


HOW TO ORDER

BALL VALVES & MANIFOLDS

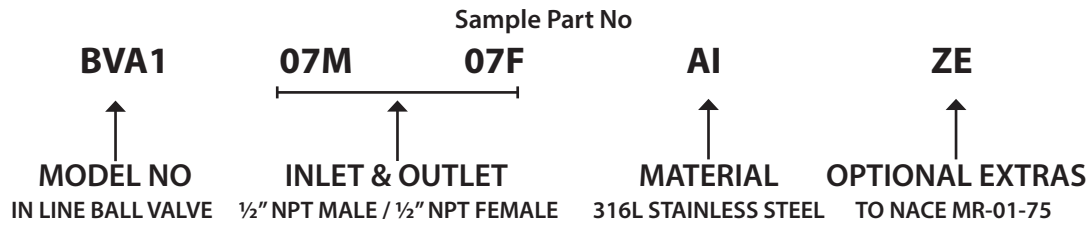

Inlet & Outlet
M = Male F = Female Thread
02M or F = G½B or G½(BSPP)
03M or F = ¼" NPT
04M or F = G¼B or G¼ (BSPP)
05M or F = ⅜" NPT
06M or F = G¾B or G¾(BSPP)
07M or F = ½" NPT
08M or F = G½B or G½ (BSPP)
09M or F = ¾" NPT
10M or F = G¾B or G¾ (BSPP)
11M or F = 1" NPT
12M or F = G1B or G1 (BSPP)
13M or F = R¼ or Rc¼ (BSPT)
14M or F = R¾ or Rc¾(BSPT)
15M or F = R½ or Rc½ (BSPT)
16M or F = R¾ or Rc¾ (BSPT)
17M or F = R1 or Rc1 (BSPT)
18M or F = R½ or Rc½(BSPT)
Key
GxB = Parallel Male Class B
G = Parallel Female
R = Taper Male
Rc = Taper Female

Material
AI = 316L Stainless Steel (UNS S31600 / S31603)
MO = MONEL® 400 (UNS N04400)
HA = HASTELLOY® C-276® (UNS N10276)
IL = INCONEL® 625 (UNS N06625)
IN = INCOLOY® 825 (UNS N08825)
TI = TITANIUM Gr.2 (UNS R50400)
DU = DUPLEX (UNS S31803)
SD = SUPER DUPLEX (UNS S32760)
HC = HASTELLOY® C-22 (UNS N06022)
SA = SUPER AUSTENITIC ST.ST 6%Mo (UNS S31254)
Note: Other materials available on request.

Optional Extras
ZA = Rated 700 bar / 10,000 psi (Dimensions available on request)
ZB = Panel Mount
ZC = Lockable Handle Without Padlock
ZD = Lockable Handle With Padlock
ZE = To Nace MR-01-75 (ISO 15156 Latest Edition)
ZF = Fire Safe (Dimensions available on request)
ZG = Surface Mount Tapped Holes
ZH = Degreased to Oxygen Standard
ZJ = Complete with Tamperproof Spanner Flat Handle
ZK = NORSOK M630 (Latest edition)
ZL = Rated 207 bar / 3,000 psi

Note: Please add any additional optional extras in alphabetical order and consider that not all options are available on all models.

STEWART-BUCHANAN GAUGES LTD

Sales Office & Manufacturing Facility - 7 Garrell Road, Burnside Industrial Estate, Kilsyth, Glasgow G65 9JX, SCOTLAND
 Tel: +44 (0)1236 821533 | Fax: +44 (0)1236 824090 | E-mail: sales@stewarts-group.com | Web: stewarts-group.com